



PLEXIGLAS® Textures for Luminaires OA000 SL

Product

PLEXIGLAS® Textures are extruded polymethyl methacrylate (PMMA) sheets. PLEXIGLAS® Textures for Luminaires OA000 SL is suitable for backlit ceiling lights and optimized for edge-lit LED ceiling lights.

For edge-lit LED ceiling lights the material reduces the lamp luminance above the minimum shielding angle in accordance with **European Standard 12464-1** Light and Lighting – Lighting of Workplaces.

Properties

In addition to the well-known and proven properties of PLEXIGLAS® such as

- outstanding light transmission and brilliance
- very high weathering resistance
- easy processability
- high surface hardness
- low weight, half that of glass
- high impact resistance, 11 times that of glass
- 100% recyclability

PLEXIGLAS® Textures for Luminaires OA000 SL has the following special features:

- very good glare suppression (see fig. 1 and 2)
- very good thickness tolerances due to the extrusion process.

Applications

Due to these properties, PLEXIGLAS® Textures for Luminaires OA000 SL is especially suitable for

- edge-lit LED ceiling lights, especially in workplace lighting
- other backlit lighting applications (recessed as well as surface-mounted ceiling lights)

Processing

PLEXIGLAS® Textures for Luminaires OA000 SL can be processed like standard PLEXIGLAS®.

The following processing guidelines are available for PLEXIGLAS®:

- Machining PLEXIGLAS® (no. 311-1)
- Forming PLEXIGLAS® (no. 311-2)
- Joining PLEXIGLAS® (no. 311-3)
- Fabricating tips for PLEXIGLAS® solid sheets (no. 311-5)

Product range

PLEXIGLAS® Textures for Luminaires OA000 SL is available ex stock in the following sizes and thicknesses:

Surface	Grade	Thickness	Size
SL	OA000	2,5 and 3 mm	2050x1650 mm

PLEXIGLAS® Textures for Luminaires OA000 SL can be used in any desired cutting size. Further details are available in the PLEXIGLAS® Sales Handbook.

Glare suppression and technical data

In ceiling lights, light-emission angles greater than or equal to 65° (the minimum shielding angle) lead to a glare effect for the viewer. PLEXIGLAS® Textures for Luminaires OA000 SL, which is optimized for the area of edge-lit LED ceiling lights, ensures that the light is focused mainly on an exit angle smaller than 65°. This significantly reduces the glare effect of the ceiling lights (see fig. 2).

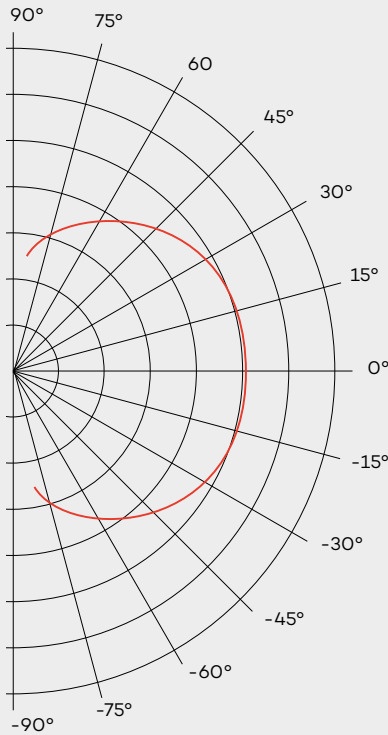


Fig. 1: Performance of a standard light-diffuser panel

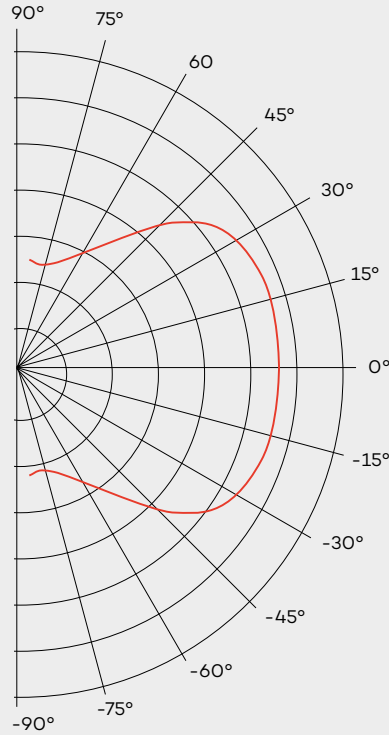


Fig. 2: Glare suppression of PLEXIGLAS® Textures for Luminaires OA000 SL for edge-lit LED ceiling lights

	Unit	Test standard	PLEXIGLAS® XT
Light transmission t_{D65}	%	DIN 5036 Part 3	92
Max. continuous working temperature	°C		70
Coefficient of linear expansion α für 0 ... 50°C	1/K (mm/m °C)	DIN 53752-A	$7 \cdot 10^{-5}$ (0,07)
Building material class		DIN 4102	B2
Fire behavior		BS 476/Part 7+6 BS 2782, Method 508 A DIN EN 13501	Class 3 TP(b) E

Other characteristic values are available in Technical Information PLEXIGLAS® GS/XT (211-1).



Röhm GmbH
Acrylic Products

Riedbahnstraße 70
64331 Weiterstadt
Germany

www.plexiglas.de
www.roehm.com

® = registered trademark

PLEXIGLAS is a registered trademark of Röhm GmbH, Darmstadt, Germany.
Certified to DIN EN ISO 9001 (Quality) and DIN EN ISO 14001 (Environment)

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments.

The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.