

PLEXIGLAS® Film 0F058

Light Guide Film

Thinner, Lighter, & More Energy-Efficient: A Global Constant Trend

Do you remember how big and heavy your computer was 5 years ago? Now have a look at the tablet you carry. It's a handy device much thinner than a book, but loaded with information and equipped with an eye-catching display. Multi-cored CPU and a battery lasting for hours are all inside the compact hardware. This is one of the miracles brought along by global innovators creating trends to be thinner, lighter, and more energy-efficient.

Behind these trends is the continuous devotion of part suppliers, especially the display panel manufacturers. By seeking new materials and technology, our panel makers are trying hard to make products meet the global trends.

Thanks to its excellent optical properties (Table 1), PMMA (Polymethyl methacrylate) is the mainstream material of light guide panels (LGP) in back light units (BLU) and display modules.

Table 1 Optical properties of PMMA, PC and Glass

	PMMA	PC	Glass
Refractive Index	1.49	1.59	1.53
Abbe Number	59	30	59
Light Transmission, %	92	87	91
Total Internal Reflection, °	42	39	41
Optical Damping, dB/km (lit.)	70-100	700	0.2

And with the demand for devices that have larger but slimmer displays, brighter effect and energy-efficiency, the leading position of PMMA is evermore solidified.

In 2009, a laptop LGP was 3 mm thick and only three years later it was half the size. For the popular tablet, the LGP is even thinner than 0.55 mm. The market keeps moving in this direction but, the existing LGP technology is reaching a limit.


A breakthrough in the industry turned to films, which allowed for even thinner and lighter panels.



Illuminate Your Application

At its purest, light is guided in PMMA over long distances though total internal reflection.

Operating principle:

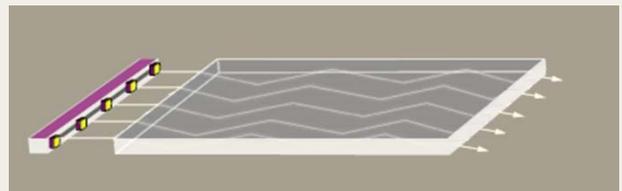

The Light can exit the film via the surface by deflecting the light rays, e.g. by a surface pattern.

Operating principle:



Processing Advantages: A Productive Practice

Processing flexibility is an advantage for LGP manufacturers to build surface microstructure on PMMA sheets and film. Surface structuring technology is well known, and various methods could meet your specific demand.

Traditionally, surface structuring of PMMA allows for both chemical and physical processing. Chemical processing includes cast & cure and printing. Physical processing consists of hot embossing, injection molding, and melt calendaring.

The hot embossing method is usually applied in processing surface structure on existing PMMA sheets and films. The sheets are at first heated above T_g (glass transition temperature), and then embossed using either hot press/stamp or embossing rolls/belts. Continuous production may be introduced with this method, while the precision of surface structure still has room for improvement.

Chemical processing with micro-structuring precision and high productivity are also available such as Ink Jet printing and laser printing. These methods create microlens on the surface of the film with uniformity and high luminance. This direct writing process provides design flexibility and saves time on development of new patterns.

These are some of the many existing technologies that could achieve the market demand of thinner LGP. Combined with PMMA film in a roll-to-roll (R2R) process, continuous production could be achieved, leading to increased production efficiency.

PLEXIGLAS® Film 0F058: A Better Choice

World-class LGP manufacturers and PMMA producers are cooperating to spread the use of optical PMMA film, accelerating the innovation downstream based on the film's excellent optical properties.

This development leads to a question: How to tell what is the best among the numerous products? Several criteria can help us.

Light transmission

The high light transmission of the PMMA film is the basis of a LGP. Thanks to its superior purity and outstanding production technology. PLEXIGLAS® Film 0F058 from Evonik Industries easily reaches high light transmission, 92%, even higher than that of glass (91%). PLEXIGLAS® Film 0F058 provides a high gloss surface on both sides.

Haze

Nearly all the materials scatter light inside. Haze is the percentage of transmitted light that is scattered. Haze of PLEXIGLAS® Film 0F058 is 0.18%, meaning little light is lost in transmission.

True to its nature

The yellow index of PLEXIGLAS® Film 0F058 is 0.27, indicating little yellowness or blueness. This ensures the LGP pure and color stable.

Weathering resistance

PMMA is best among polymers for outdoor applications. Even, after extended time periods, PLEXIGLAS® Film 0F058 still maintains its high light transmission and shows no change in color compared to other plastics.

Optical quality

PMMA manufacturers must create an optical grade standard in order to ensure these properties are met. Therefore, the ability to manufacture the purist grade of the material will directly impact the effectiveness of the LGP.

Reliability test The film properties do not change after storage for 500 h at 85°C and 85% rel. humidity.

With side emitting micro LEDs becoming commercialized, PLEXIGLAS® Film 0F058 offers the thinnest LGF available in the market, providing a perfect match for light outcoupling and maximizing luminance.

Roll-to-Roll Solution

PLEXIGLAS® Film 0F058 offers a unique advantage for LGP fabricators: available in roll form (master rolls and slit to width rolls) and not just sheets. This enables customers to carry out roll-to-roll production, greatly enhancing the productivity, and consequently lowering total cost.

Technical data

PLEXIGLAS® Film 0F058 Properties (film thickness 500µm)	Unit	Parameter	Standard	Values
Light transmittance	(%)	D65/10°	ISO 13468-2	92.4
L*	-	t _(D65/10°)	DIN 5036	97
a*	-	t _(D65/10°)	DIN 5036	0
b*	-	t _(D65/10°)	DIN 5036	0.1
Yellowness Index	-	t _(D65/10°)	ASTM D1925	0.27
Color coordinate X	-	t _(D65/10°)	DIN 5036	0.314
Color coordinate Y	-	t _(D65/10°)	DIN 5036	0.331
Haze	(%)	@23°C	ASTM D1003	0.18
UV transmittance	(%)	(280-380)	ISO EN 410	91.3
Tensile stress at yield	MPa	-	ISO 527-3	-
Tensile strength	MPa	-	ISO 527-3	88.2
Nom strain at break	(%)	-	ISO 527-3	5.2
Glass transition temp. (Tg)	°C	-	-	109
Refractive Index	-	@23°C	-	1.49
Specific gravity	(g/cm ²)	-	ISO 1183	1.19
Max. water absorption	(%)	@23°C	ISO 62	1.9
Surface energy	(mN/m)	@23°C	calc.method ORKW	44-45

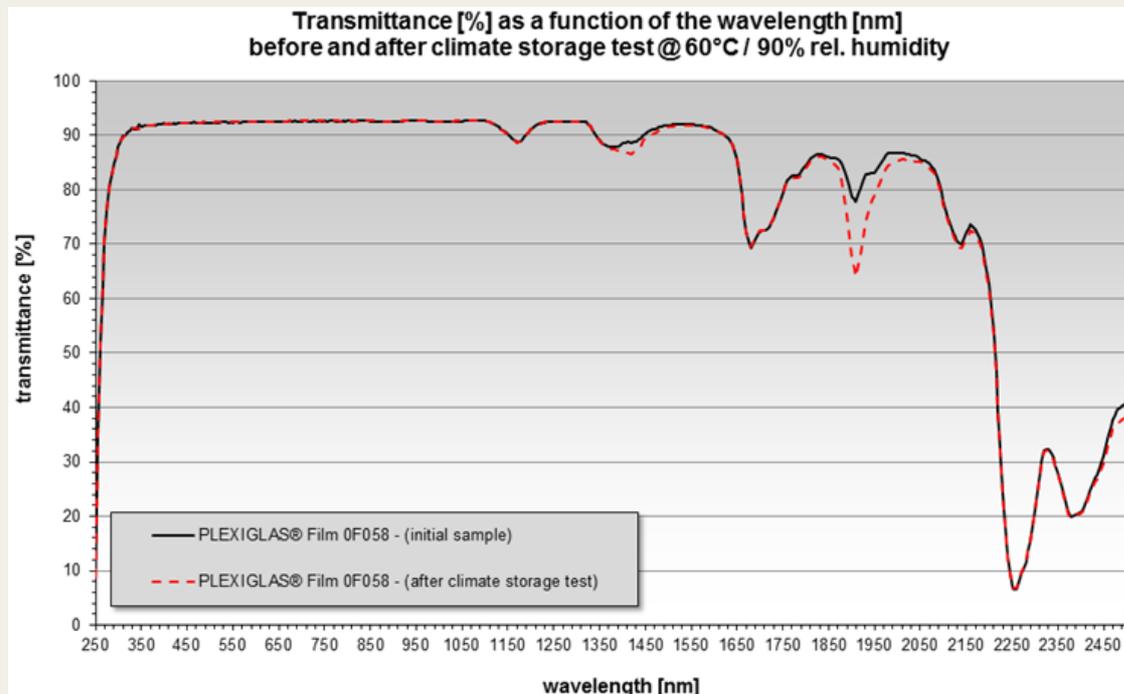


Table 2 Sales range of PLEXIGLAS® Film 0F058

PLEXIGLAS® Film 0F058	
Thickness, µm	200, 375, 500
Width, mm	1270
Roll length, m	500-1000

Cut to size rolls in optical quality for clean rooms are being offered.

® = registered trademark PLEXIGLAS is a registered trademark of Evonik Röhm GmbH, Darmstadt, Germany.
Certified to DIN EN ISO 9001 (Quality) and DIN EN ISO 14001 (Environment)

Evonik is a worldwide manufacturer of PMMA products sold under the PLEXIGLAS® trademark on the European, Asian, African and Australian continents and under the ACRYLITE® trademark in the Americas.

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

Evonik Performance Materials GmbH

Acrylic Polymers

Kirschenallee, 64293 Darmstadt, Germany

films@evonik.com www.plexiglas.net www.evonik.com

Ref. No. 239-2 July 2015